

Call Points

CP-15 / 24 / 31 Series

Patented, Reliable, Flexible, Conventional



The GEM Call Point is a conventional call point that offers single or double pole changeover contacts with normally open and closed connections. It is supplied with a breakable or plastic glass and test key and available in various colors for your choice.

Specifications

- Operating voltage: 12~24VDV
- Choice of operating element: Plastic or glass
- Contact resistance: 100m Ω
(50 m Ω for CP-24 series)
- Contact rating: 5A 125/250 VAC
(1A/125VAC for CP-24 series)
- Test key included
- Choice of 5 colors (Green/Blue/Yellow/White/Red)

Patents, Approvals, and Listings


- CE: 332113

CP-15/24/31 Series Call Points


Models	Contact	Break Glass	Plastic Glass	Backlight	Case Colors
CP-15-GE	Single pole	●	—	—	Green
CP-15GP	Single pole	—	●	—	Green
CP-24G	Double pole	●	—	—	<u>Green</u> , <u>Red</u> , <u>Yellow</u> , <u>White</u>
CP-24G-L	Double pole	●	—	●	<u>Green</u> , <u>Red</u> , <u>Yellow</u> , <u>White</u>
CP-24GP	Double pole	—	●	—	Green
CP-24GP-L	Double pole	—	●	●	Green
CP-31G-UC	Double pole	●	—	—	<u>Green</u> , <u>Red</u> , <u>Yellow</u> , <u>White</u> , <u>Blue</u>
CP-31GP	Single pole	—	●	—	<u>Green</u> , <u>Red</u> , <u>Yellow</u> , <u>White</u> , <u>Blue</u>

CP-15/24/31 Series Dimensions


CP-15 Series



CP-24 Series



CP-31 Series



All dimensions in mm

Accessories

CP-21-GL
Breakable glass



CP-31-UC
Clear plastic cover



CP-31-PL
Plastic glass



P-PL-CP-21-24-KEY
Test key (For CP-15/24 series)



P-PL-CP-31-K
Test key (For CP-31 Series)




Resettable Call Points

CP-32/33 Series

Patented, Safe, Visible, Easy to Install



Detachable Terminal Block

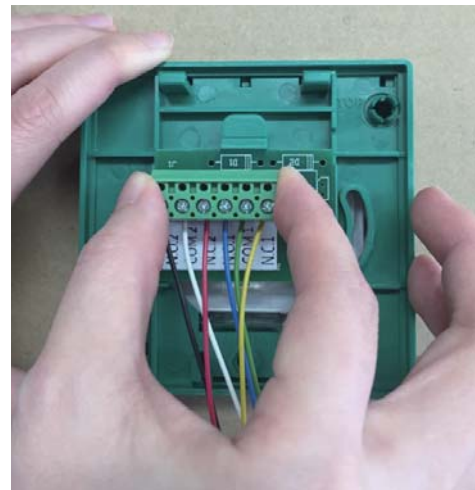

The GEM Resettable Call Point features a resettable operating element that produces no dangerous glass shards, making it suitable for use in high traffic areas, such as schools, shopping malls, or commercial buildings. The CP-33 series is designed with detachable terminal blocks allowing for easy and quick installation.

Specifications

- Operating voltage: 12/24 VDC (Default 24VDC for CP-32BZ-LB series)
- Contact resistance: 100 mΩ
- Contact rating: 5A 125/250 VAC
- Resettable key included
- Choice of 5 colors (Green/Blue/Yellow/White/Red)
- Detachable terminal block for easy installation (For CP-33 series)

Standard Options

- LED indicator
- Blue backlight
- Built-in 80db buzzer

Patents, Approvals, and Listings

- CE: 332113
- Patent: Taiwan M444599




CP-32/33 Series Resettable Call Points


Models	Contact	Blue Backlight	LED	Built-in Buzzer	Case Colors
CP-32G CP-33G	Double pole	—	—	—	<u>Green</u> , <u>Red</u> , <u>Yellow</u> , <u>White</u> , <u>Blue</u>
CP-32G-L	Double pole	—	●	—	<u>Green</u> , <u>Red</u> , <u>Yellow</u> , <u>White</u> , <u>Blue</u>
CP-32G-LB	Double pole	●	—	—	<u>Green</u> , <u>Red</u> , <u>Yellow</u> , <u>White</u> , <u>Blue</u>
CP-32GBZ-LB	Double pole	●	—	●	<u>Green</u> , <u>Red</u> , <u>Yellow</u> , <u>White</u> , <u>Blue</u>

CP-32/33 Series Dimensions

CP-32G Series
CP-32G-L Series
CP-33G Series

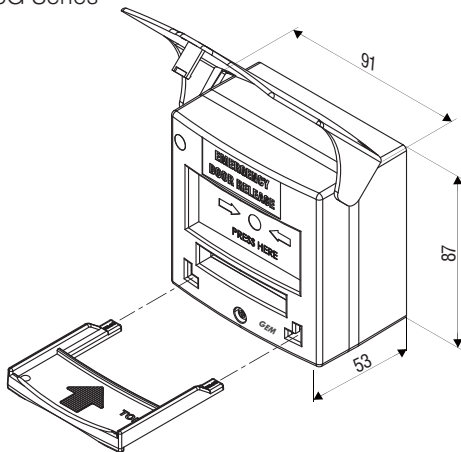

CP-32G-LB Series
CP-32GBZ-LB Series

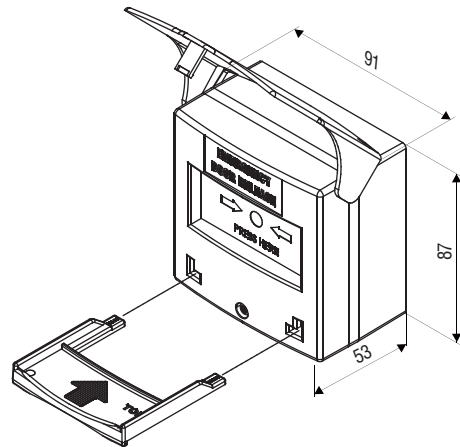

Accessories


P-PL-CP-32-K
Resettable key



P-PL-CP-32-UC
Clear plastic cover



CP-33 Series with Detachable Terminal Blocks

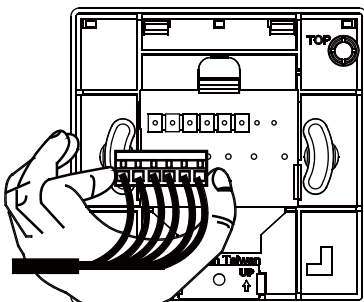

The CP-33 series with Detachable Terminal Blocks is designed with convenient terminal block concept for easy and quick installation. Simply wire the terminal connector and plug it in the back of the CP-33 product. No re-termination is required.