Electric Strikes **GK450/480 Series** Durable, Versatile Strikes for Residential and Business





The GK450/480 series ANSI electric strike is designed for use with cylindrical locksets and mortises locksets without a deadbolt and can be installed in metal and wood door frames. It includes an optional latch monitor and is field reversible for fail-safe or fail-secure operation. The GK485 features 1/8" (3mm) horizontal strike adjustment to accommodate different installations.

Standard Features

- Non-handed fully reversible
- Field reversible fail-safe or fail-secure
- Static strength 1,500 lbs (680Kg)
- Dynamic strength 70 ft-lbs
- Endurance 100,000 cycles UL tested, 1,000,000 cycles factory tested
- Brushed stainless steel (US32D) finish

Optional Feature


• Latch monitor

Patents, Approvals, and Listings

- UL 1034 burglary resistant listed : BP10269
- UL 294 Access Control System listed: BP10269

Changing Fail-Safe / Fail-Secure

Fail-safe or fail-secure is field reversible by reversing the round screw.






Tel: +886-2-2267-7986 Fax: +886-2-2267-9876 www.gianni.com.tw inquiry1@gianni.com.tw

GK450/480 Series ANSI Electric Strikes


Models	Voltage (VDC)	Latch Throw	Optional Latch Monitor	Reversible Fail-Safe Or Fail-Secure	Frame	Body Construction
GK450 GK450-ST	12, 24, or dual 12/24	9/16" (15mm)	•	•	Hollow Metal	Zinc alloy Stainless steel
GK451 GK451-ST	12, 24, or dual 12/24	9/16" (15mm)	•	•	Wood	Zinc alloy Stainless steel
GK480 GK480-ST	12, 24, or dual 12/24	3/4" (19mm)	•	•	Hollow Metal	Zinc alloy Stainless steel
GK481 GK481-ST	12, 24, or dual 12/24	3/4" (19mm)	•	•	Wood	Zinc alloy Stainless steel
GK485	Dual 12/24	3/4" (19mm)	•	•	Hollow Metal	Zinc alloy

Dimensions

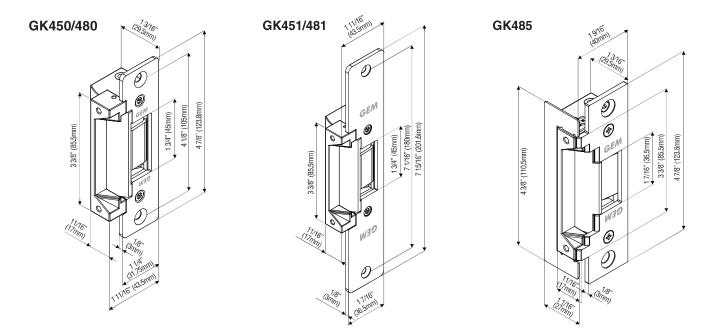

Strike Adjustment (For GK485M Only)

Adjust strike easily on site by loosening screws and shifting the lip bracket along with the keeper to the proper horizontal position.

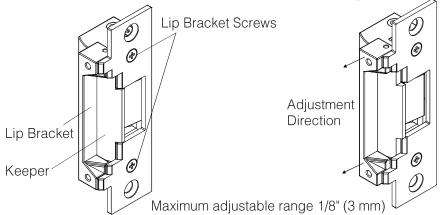



Lockset Application (Note: Lockset is Not sold with electric strike model.)

Electric Strike Models	Locksets	
GK450, GK480, GK451, GK481, GK485, GK486	Cylindrical Lockset with center lined latchbolt	
GK450,GK480, GK451,GK481, GK485	GEM-470R/470L (Mortise Deadlatch) Lockset with center lined latchbolt	
GK485	Mortise Mortise lockset without a deadbolt	


*Above models include model number with or without the "M" and/or "ST" suffix.

Accessories

Lip Extensions (Option)




2"(50mm)



Lip extensions are available to meet the needs of a particular jamb width.

Trim Plate



Trim plate

Trim plate is used to cover any imperfections caused while prepping the frame cut out.

Warranty

The proudct is warranted against defects in material and workmanship while used in normal service for a period of 3 years from the date of sale to the original client. The GEM policy is one of continual development and improvement; therefore GEM reserves the right to change specifications without notice.



GIANNI INDUSTRIES, INC