

Entry - Premium monitor

System specifications

Yes - IEEE 802.3af class 0 Power over Ethernet (PoE)

Ethernet bandwidth requirement 1Mb/s multicast per panel during call

Monitors per system ≤1000 TCP/IP ethernet extension limit 100m/328ft

Cable type

Current consumption 3.2 W (Average) 4.5 W (Max)

Call log events 100

Hardware features

Audio system Full Duplex

Colour LED, capacitive Screen

touch screen

7", 16:9 Screen size 800 x 480 Screen resolution

Camera Digital with IR filter Door bell input 2 wire, 8v illumination supported

LED status indicator RGB LED White Back lighting colour

Software features

Selectable ringtones Yes Do Not Disturb function Yes Call snapshot Yes Built in help menu Yes 'View video' mode Yes Concierge mode Yes

-0°C - +49°C Operating Temperature

+32°F - +120°F


Moisture resistance No Vandal Resistance

Low Surface mount Yes

Backbox compatibility UK, Euro, USA

Accessories


Desktop stand Optional




The Entry Premium Monitor comes either with or without a handset, and can be wall or desk mounted. Entry components simply interconnect using Cat5 or standard RJ45 terminated patch cables. Entry can also utilise existing network infrastructure for simple installation. PoE technology runs power and data along the same cable to avoid the need for separate power supplies. A visitor initiates a video call via the bell button on the external panel. Visitor access can be granted via the Entry Premium Monitor, which features an intuitive capacitive touchscreen user interface.



DS1064

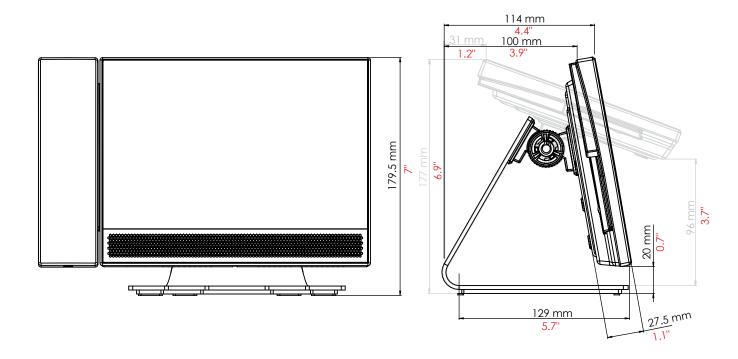

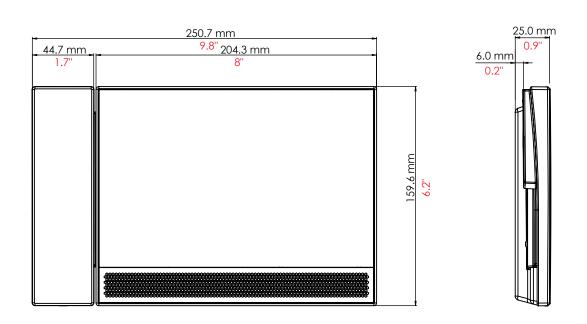

Entry Premium monitor -surface mount	337-290
	227 202
Entry Premium monitor - surface mount with handset	337-292
Accessories	
Entry Premium monitor - desktop stand	337-294
Entry Fremilian monitor acsistop stand	JJ1 - ZJ4

