

DS1064

. .

Entry - Premium monitor

System specifications

Power over Ethernet (PoE)	Yes - IEEE 802.3af class 0	
Ethernet bandwidth requirement	1Mb/s multicast per pane	
Monitors per system	≤1000	
TCP/IP ethernet extension limit	100m/328ft	
Cable type	CAT5	
Current consumption	3.2 W 4.5 W	(Average) (Max)
Call log events	100	

	4.5 W (Wax)	
Call log events	100	
Hardware features		
Audio system	Full Duplex	and a share a s
Screen	Colour LED , capacitive touch screen	and a second
Screen size	7", 16:9	
Screen resolution	800 x 480	
Camera	Digital with IR filter	
Door bell input	2 wire, 8v illumination supported	
LED status indicator	RGB LED	
Back lighting colour	White	
Software features		Entry is a door entr
Selectable ringtones	Yes	Paxton's Net2 acces features of Net2 or
Do Not Disturb function	Yes	agement solution,
Call snapshot	Yes	that auto-detect or

er panel during call

Selectable ringtones	Yes
Do Not Disturb function	Yes
Call snapshot	Yes
Built in help menu	Yes
'View video' mode	Yes
Concierge mode	Yes
Action buttons	Yes - only in conjunctio

Environment

Operating Temperature	-0°C - +49°C +32°F - +120°F
Moisture resistance	No
Vandal Resistance	Low
Surface mount	Yes
Backbox compatibility	UK, Euro, USA
Accessories	


Desktop stand


Optional

Entry is a door entry system that works standalone or alongside Paxton's Net2 access control, combining door entry with key features of Net2 or as part of our access control and video management solution, Paxton10. Entry consists of 3 components that auto-detect on set up; external panel, interior monitor and door control unit. Entry is a plug and play solution that comes with a range of panel options and is suitable for a wide variety of sites.

The Entry Premium Monitor comes either with or without a handset, and can be wall or desk mounted. Entry components simply interconnect using Cat5 or standard RJ45 terminated patch cables. Entry can also utilise existing network infrastructure for simple installation. PoE technology runs power and data along the same cable to avoid the need for separate power supplies. A visitor initiates a video call via the bell button on the external panel. Visitor access can be granted via the Entry Premium Monitor, which features an intuitive capacitive touchscreen user interface.

DS1064

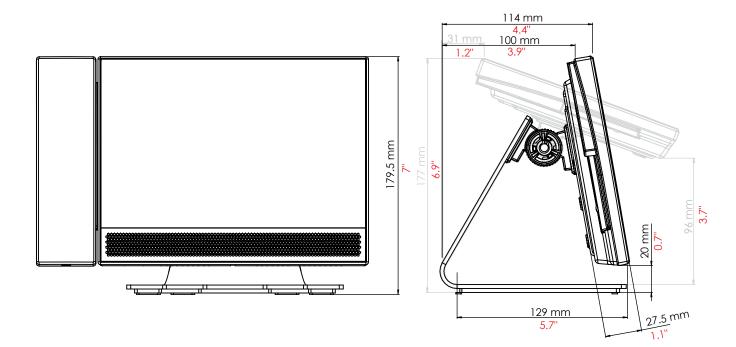

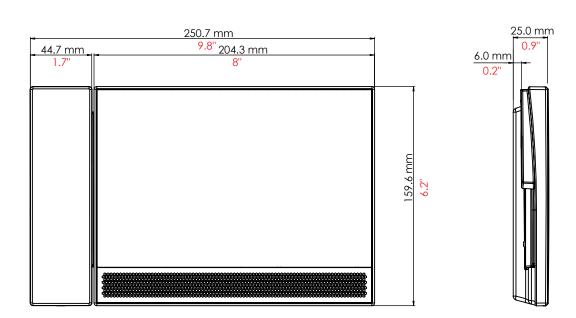

Entry Premium monitor - desktop stand	337-294
Accessories	
Entry Premium monitor - surface mount with handset	
Entry Premium monitor -surface mount	337-290



