




# J275 F FIXED traffic bollard

1. Power supply and wiring not required
2. Simple installation and limited digging operations
3. Observance of aesthetic consistency in mixed installations with other retractable bollards
4. Possibility to remove the bollard to temporarily open the pedestrian area to traffic

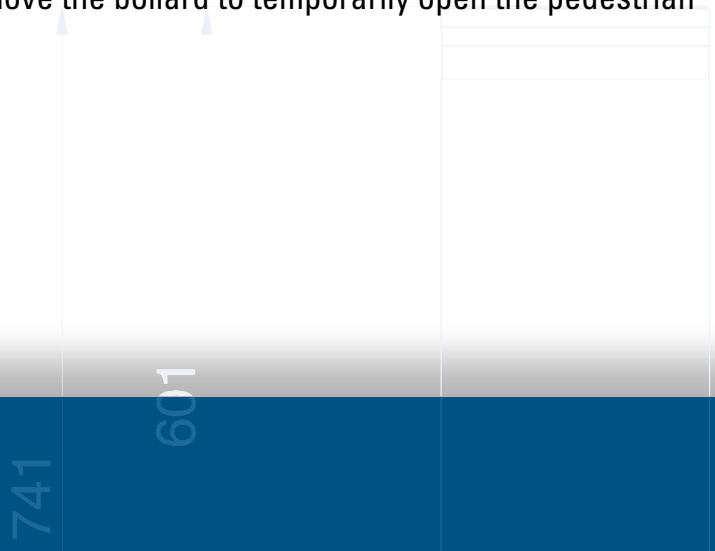

## DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	J275 F H600	J275 F H800	J275 F H600 Stainless steel	J275 F H800 Stainless steel
Cylinder height from ground	600 mm	800 mm	600 mm	800 mm
Cylinder diameter	275 mm			
Cylinder material	Steel S235JR EN 10219 (4 mm thick)		AISI 316L satin finishing (3 mm thickness)	
Cylinder treatment	Cataphoresis and polyester powder paint, dark grey metallised RAL 7021		Satin finish	
Reflective strip height	55 mm			
Standard reflecting strip colour	Orange			
Break in resistance	35,000 J		59,000 J	
Total weight	34 Kg	38 Kg	34 Kg	38 Kg
Walled in pit with cylinder profile (LxWxH)	450 x 450 x 55 mm			
Excavation dimensions (LxWxH)	750 x 750 x 150 mm			

J275 F



#### PAINTED STEEL VERSIONS

Models	Height	Finish	Item code
J275 F 600	600 mm	painted steel	116020
J275 F 800	800 mm		116021

#### The product comes with:

- a 7 mm steel cylinder cathodolysis treated and painted
- powder coated dark grey metallised RAL 7021
- flashing light ring with central LED\*

#### AISI 316L STAINLESS STEEL VERSIONS


Models	Height	Finish	Item code
J275 F 600	600 mm	satin-finished AISI 316L stainless steel	116040
J275 F 800	800 mm		116041

#### The product comes with:

- 6 mm thick stainless steel cylinder with satin-finished treatment
- flashing light ring with central LED\*

(\* The power supply unit (24 Vdc) and the cable (2x1.5 mm) for the illuminated ring are not supplied.

#### INSTALLATION ACCESSORIES

Item	Item code	
Fixed bollard fixing frame JPF275	116120	

#### OPTIONAL ACCESSORIES

Item	Item code	
Pit cover JC275	116201	